


50 JBL



JBL

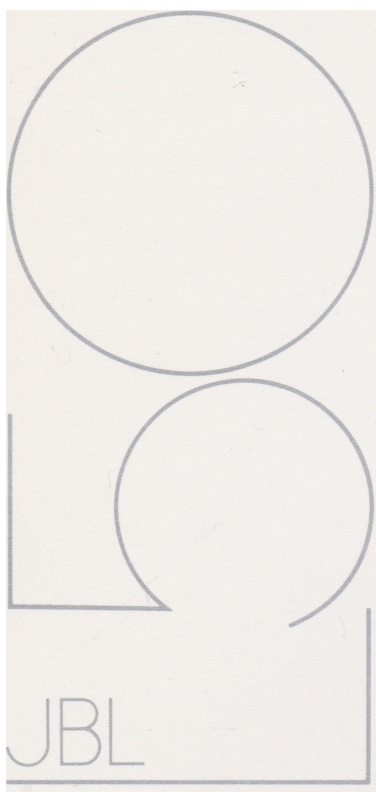

The L50 is the least expensive three-way system made by JBL, but it sounds like more. It is a direct result of the thorough, innovative engineering that produced the remarkable JBL L212 and L110 loudspeaker systems, and delivers much of their exceptional accuracy and realism at a more moderate price. In design integrity and sophistication, the L50 is the equal of its more costly predecessors. It includes one of the most advanced frequency dividing networks JBL has yet produced, and was designed using the most modern techniques available: computer analysis and laser interferometry.

JBL engineers programmed a computer with a very accurate mathematical model of a loudspeaker in its enclosure. The computer produced theoretical plots of impedance and frequency response for several sets of conditions. Laboratory samples of the most promising computer simulations were built and actual performance measurements were compared with the computer simulations. Because no computer can match the discernment of the human ear, several different prototype types were evaluated extensively by a listening panel. The final system was refined in response to these listening tests.

JBL also conducted holographic studies of the midrange loudspeaker under dynamic conditions, attempting to improve critical cone materials and design. This type of laser interferometry study provides a specific answer to the question of cone behavior throughout the frequency range of a loudspeaker, making it one of the most powerful tools available to the acoustic designer.


### Components

Each component of every JBL loudspeaker system is designed and produced to the most rigorous standards in the industry. JBL loudspeaker frames are massive cast structures, produced to exacting tolerances. Magnetic assemblies are precisely manufactured of low-reluctance iron, energized by large, high grade magnets. Voice coils are held within one turn of design specifications. Cones are designed for the best combination of stiffness, density and weight.

### Low Frequency

Extensive research resulted in a new 250-mm (10-inch) loudspeaker with a 100-mm (4-inch) center dome. This driver employs a 50-mm (2-inch) voice coil and 1.1-kg (2½-pound) magnetic assembly energized by a powerful Alnico V magnet. The voice coil is large and the magnetic assembly massive in comparison to most loudspeakers of this size, resulting in increased efficiency and superior transient response. At higher frequencies, energy is coupled to the center dome. Radiation from the dome's smaller area (relative to the total area of the cone) maintains smooth response and wide dispersion to frequencies far higher than the primary operating range of the driver, essential for smooth transition to the midrange loudspeaker.

A unique fiberglass acoustic resistance shell matches the loudspeaker's characteristics to the enclosure volume. In place behind the loudspeaker, it provides damping without restricting normal cone movement. The result is a flatter impedance curve and more nearly linear frequency response throughout the bass region.

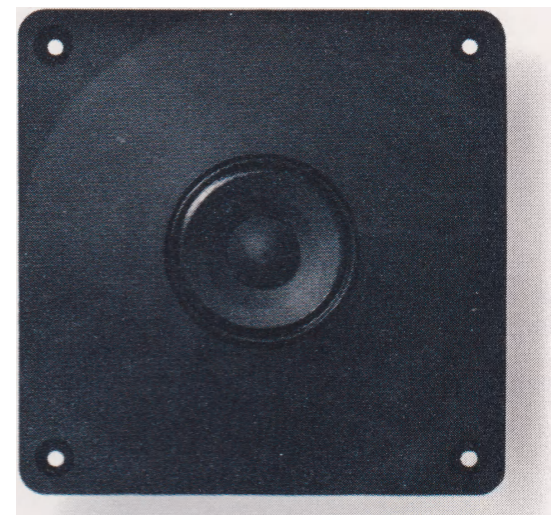

High Freq

### Midrange

The 130-mm (5-inch) midrange loudspeaker, housed within an isolated sub-chamber to prevent detrimental interaction with the low frequency loudspeaker, delivers undistorted reproduction even at extreme volume levels. Its 22-mm (¾-inch) diameter copper voice coil is unusually large in relation to cone size, yielding exceptional transient response and efficiency. A very stiff cone is used to reduce the possibility of cone breakup at very high power levels. The aluminum center dome provides smooth frequency response through the transition to the high frequency loudspeaker. Because the midrange loudspeaker is considerably more efficient than the low frequency loudspeaker, it operates well below its full potential, thereby maintaining the substantial reserve dynamic range necessary to reproduce high intensity program peaks without strain or any distortion.

### High Frequency

The exceptionally open high frequency reproduction of the L50 is provided by a 36-mm (1.4-inch) loudspeaker. Despite large magnetic assembly and voice coil the diameter has been kept small to achieve excellent dispersion. The cone compliance is surrounded by a hard, sloped surface that serves as a transition to the enclosure baffle, eliminating discontinuities and diffraction effects. This method of coupling the high frequency loudspeaker to the baffle has proved to be more effective than the use of sound absorbent materials.



**Midrange**



**Low Frequency**

### **Frequency Dividing Network**

The signal from the amplifier consists of a wide range of frequencies. The frequency dividing network allocates each portion of the audio spectrum to the appropriate component of the loudspeaker system. Smooth, imperceptible operation of the network is vitally important; otherwise, the listener would perceive the performance of individual components rather than that of an integrated loudspeaker system.

To achieve blended performance, the drivers operate at diminishing output levels above and below the stated cross over frequencies. Variables that must be considered in network design include the acoustic and electrical characteristics of the individual drivers and the placement of the drivers on the baffle. The network installed in the L50 incorporates impedance-leveling and phase correcting circuitry, ensuring that the system operates in a nearly ideal manner through the transition frequencies. This circuitry, combined with the extended frequency response of the individual drivers, gives the sound of the L50 its startling transparency.

The network is equipped with controls for midrange and high frequency output to accommodate variations in room acoustics and personal preferences.

### **Total Energy Response**


Like the L212 and L110 systems whose technology it shares, the L50 was engineered not only for wideband response and wide high frequency dispersion, but for the most consistent possible dispersion throughout the operating range of the system. Virtually every aspect of the design of the L50 contributes to this difficult achievement, such as the vertical array of the drivers, which minimizes interference in the critical horizontal plane. The L50 establishes a sonic image with precision, solidity and depth: essential ingredients of realism in sound reproduction lost to systems of lesser sophistication.

### **Power Capacity**


The specified power capacity indicates the continuous program power level that can be accepted by the L50. Its peak power capacity is considerably greater than the continuous rated value, as indicated by the remarkable transient response of JBL components. The L50 produces sound at comfortable listening levels when driven by an amplifier having an output of as little as 10 watts continuous sine wave per channel.<sup>1</sup> However, for reproduction of the full dynamic range of contemporary recordings at high volume, a high quality amplifier delivering up to 70 watts continuous sine wave per channel will provide optimum performance. Such an amplifier has the reserve power necessary for accurate reproduction of transients, which can reach momentary peaks equivalent to ten times the average power level.

A number of loudspeaker systems can handle large amounts of power; others are highly efficient. JBL products are unique in their ability to combine both attributes.

1. The continuous sine wave rating of amplifier power is the most stringent method currently used in the audio industry. Many amplifier manufacturers use the term "watts rms" as a direct equivalent to the more meaningful "watts continuous sine wave".

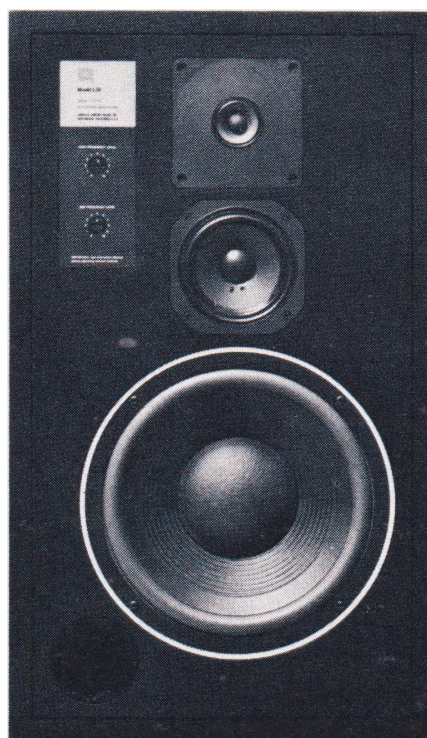

In the JBL laser laboratory, holograms are used to study the behavior of loudspeaker components under operating conditions.

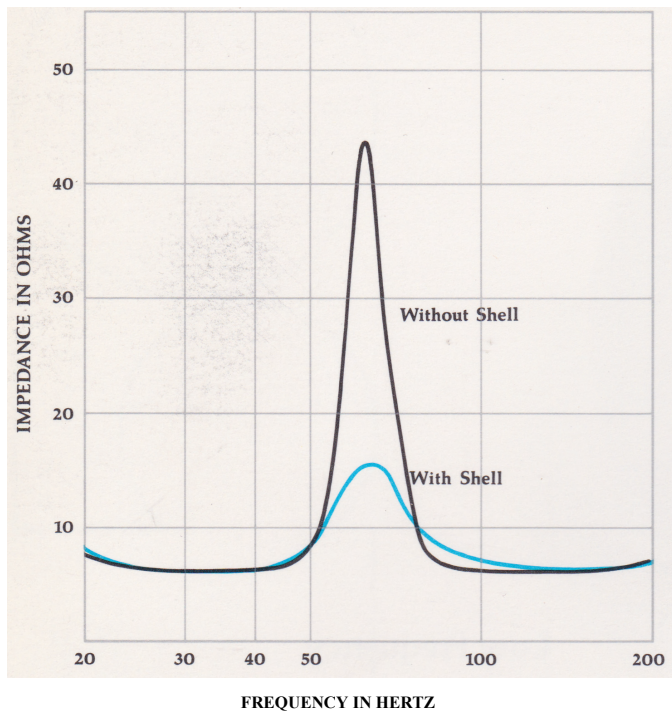

### Effect of the Acoustic Resistance Shell

Impedance curves of the low frequency loudspeaker mounted in the L50 enclosure were taken under standard laboratory test conditions. The effect of the shell can be seen by comparing the curves. Impedance is the electrical load the loudspeaker presents to the amplifier; current from the amplifier drives the loudspeaker. Amplifiers provide less current at higher impedances. Therefore, the amplifier has less control of the loudspeaker through those frequencies corresponding to the sharp peak in the impedance curve. The shell considerably reduces the magnitude of the peak. The smoother impedance enables the amplifier to maintain consistent control of the loudspeaker throughout its operating range.

### Enclosure

The enclosure is a functional component of the loudspeaker system. Its internal volume is matched to the characteristics of the low frequency loudspeaker. A ducted port extending through the baffle provides proper acoustic loading for optimum bass response while maintaining efficiency and power capacity.

The L50 enclosure embodies the principles of fine furniture design and construction that have made JBL a leader in the industry. The enclosure panels are constructed of dense compressed wood, superior to solid wood in its acoustic properties. The finish veneer is American black walnut, hand rubbed to a lustrous finish that enhances the natural beauty of grain structure and color. Detail work is apparent: materials are carefully selected and skillfully prepared; joints are expertly closed; scratches, dents, glue-lines and other defects are nonexistent. To achieve maximum strength and resistance to vibration, all panels are constructed of 19-mm (<sup>3</sup>/<sub>8</sub>-inch) stock; side and back panels are lined with acoustic damping material to attenuate standing waves within the enclosure.

### Specifications

JBL has traditionally refrained from listing data for which no widely accepted test procedures has been established. In the absence of such standards, any laboratory can legitimately produce a variety of values, depending on the conditions selected.

<b>Maximum Recommended Amplifier Power</b>	<b>70 watts per channel</b>
<b>Nominal Impedance</b>	<b>8 ohms</b>
<b>Crossover Frequencies</b>	<b>800 Hz, 3 kHz</b>
<b>System Sensitivity<sup>1</sup></b>	<b>88 dB SPL, 1 watt, 1m(3.3ft)</b>
<b>Low Frequency Loudspeaker</b>	
<b>Nominal Diameter</b>	<b>250 mm 10 in</b>
<b>Voice Coil</b>	<b>50-mm (2-in) copper</b>
<b>Magnetic Assembly Weight</b>	<b>1.1kg 2.51lb</b>
<b>Flux Density</b>	<b>0.85 tesla (8500 gauss)</b>
<b>Sensitivity<sup>2</sup></b>	<b>88 dB SPL, 1 watt, 1m(3.3ft)</b>
<b>Midrange Loudspeaker</b>	
<b>Nominal Diameter</b>	<b>130 mm 5 in</b>
<b>Voice Coil</b>	<b>22-mm (7/8-in) copper</b>
<b>Flux Density</b>	<b>1.4 tesla (14,000 gauss)</b>
<b>Sensitivity<sup>3</sup></b>	<b>91 dB SPL, 1 watt, 1m(3.3ft)</b>
<b>High Frequency Loudspeaker</b>	
<b>Nominal Diameter</b>	<b>36 mm HAIN</b>
<b>Voice Coil</b>	<b>16-mm (5/8-in) copper</b>
<b>Magnetic Assembly Weight</b>	<b>0.74 kg 1 1/2 lb</b>
<b>Flux Density</b>	<b>1.5 tesla (15,000 gauss)</b>
<b>Sensitivity<sup>4</sup></b>	<b>91 dB SPL, 1 watt, 1 m (3.3 ft)</b>
<b>General</b>	
<b>Finish</b>	<b>Oiled walnut</b>
<b>Grille Colors</b>	<b>Blue, brown, rust</b>
<b>Dimensions</b>	<b>622 mm x 362 mm x 314 mm deep 24 1/2 in x 14 1/4 x 12 5/32 in deep</b>
<b>Shipping Weight</b>	<b>21kg 47lb</b>

<sup>1</sup>All sensitivities are measured under hemispherical free-field conditions. In a room, an additional 1 to 3 dB SPL would be realized.

<sup>2</sup>Averaged from 100 Hz to 500 Hz, within 1 dB.

<sup>3</sup>Averaged from 1 kHz to 3 kHz, within 1 dB.

<sup>4</sup>Averaged above 2 kHz, within 1 dB.



James B. Lansing Sound, Inc.  
8500 Balboa Boulevard  
Northridge, California 91329 U.S.A.

JBL continually engages in research related to product improvement. New materials, production methods and design refinements are introduced into existing products without notice as a routine expression of that philosophy. For this reason, any current JBL product may differ in some respect from its published description but will always equal or exceed the original design specifications unless otherwise stated.

SB50/8-78 Printed in U.S.A.

## **JBL L50**

### **\$276**

JBL has recently introduced several new speakers, each of which can be considered as a nail in the coffin of the "West Coast" sound. For those who aren't aware of the characteristics of that type of sound they include an artificially pumped up mid-bass, very forward midrange, and a peaky high end with poor dispersion. Not too pleasant, you'd think, but speakers of that sort (and we're not saying that all speakers originating on the west coast are "West Coast" speakers) were very popular for a long time. In fact many recording studios still use them as monitors, which may account for the questionable quality of some of the records being produced. At any rate, JBL has phased out a number of "West Coast" speakers and replaced them with some pretty respectable models. In our last issue we examined the LI 10 and found it to be a fine overall performer, and a worthy replacement for the now discontinued Century LI00. The most recently introduced new JBL is the L50, and, while it's not a direct replacement for a specific previous model, it continues the JBL tradition of fine craftsmanship and materials, but in the context of a modern, accurate speaker system.

A three way system, the L50 uses a 10" woofer, a 5" midrange driver, and a 1.4" tweeter. The midrange unit is the same as that employed in the LI 10 which would account for the pleasing similarity in sound between the two systems. In the L50 it is positioned in a separate isolated sub-chamber to prevent any interaction with the woofer. The woofer itself is surrounded by a device JBL calls an acoustic resistance shell. It is said to match the loudspeaker's performance characteristics to the internal volume of the enclosure. By helping to insure a smooth impedance curve this shell allows the amplifier to maintain better control over the motion of the driver. The 1.4" cone tweeter, which is positioned with the other drivers in a vertical configuration, has been integrated with the enclosure in such a way as to prevent diffraction effects.

The overall sound of the L50 is very pleasant - as we said, it's strikingly similar to the LI 10. The use of the same midrange driver would account for this: the fundamentals and lower overtones are what determines the basic sound of a piece of music and these frequencies are handled by the 5" mid range driver shared by the LI 10 and L50. The differences show up at the extreme low and high ends. The bass response of the L50 is good, but doesn't go as deep as the LI 10. For practical purposes, though, the L50 has as much bass as one might reasonably require, and JBL has built in a slight mid-bass rise which might be just a simple reminder of the L50's heritage. The high end is clean and fairly well dispersed, especially considering the use of a cone tweeter.

Cabinet finish and construction are up to usual JBL standards, and when it comes to those two aspects of speaker manufacturing JBL sets the standards. The grill cloth is available in blue, brown, or rust and is, as usual, visually striking.

In all, the JBL L50 is a fine sounding loudspeaker that should be popular with long-time JBL fans as well as audiophiles who might never before have considered a speaker from that source. For the price it offers excellent value.

Loud and Proud

HIFIGOTEBORG.se a

JBL

WANT TO RELAX TO BEAUTIFUL  
MUSIC

**WELCOME**

WE HAVE GOOD HIFI AT YOUR  
SERVICE

PLEASE WAIT HERE & A MEMBER  
OF OUR TEAM WILL BE WITH  
YOU SHORTLY.

Or press finger HERE