

RB-5000

STEREO DC POWER AMPLIFIER

- Class AB operation «DC amplification for dynamic range »500 watts per channel, min RMS. both channels driven into 8 ohms from 20 to 20.000Hz with no more than 0.009% total harmonic distortion «Direct-coupled Darlington quadruple parallel push-pull, OCl pure complementary output circuitry *2 totally independent power supplies with 2 toroidal power transformers «2 large average-watt meters and 16 LED peak indicators «Calibrated 2dB-stepped attenuator-type level controls
- Subsonic and lowfilters «Meter range selector «Power limiter 3 pairs of speaker systems «Input on-of switch for safety Standby.

RC-5000

STEREO DC CONTROL AMPLIFIER

- stage Class-A parallel push-pull circuitry «Direct-coupled ND octave equalizer with t stage FET and active resonator circuit
- «Built-in head amplifier MC cartridge
 - Independent recording selector «Front panel controls enable you to match exactly the characteristics of your chosen phono cartridge «Subsonic and supersonic filters in addition to regular low and high inters «Full tape dubbing with 3 tape recorders «2 totally independent power supplies with 2 power transformers




RB-5000



RC-5000

Loud and Proud

HIFIGOTEBORG.se a

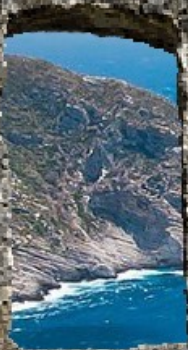

WANT TO RELAX TO BEAUTIFUL
MUSIC

WELCOME

WE HAVE GOOD HIFI AT YOUR
SERVICE

PLEASE WAIT HERE & A MEMBER
OF OUR TEAM WILL BE WITH
YOU SHORTLY.

Or press finger HERE